
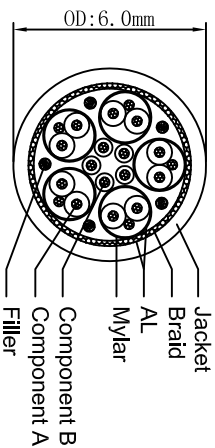
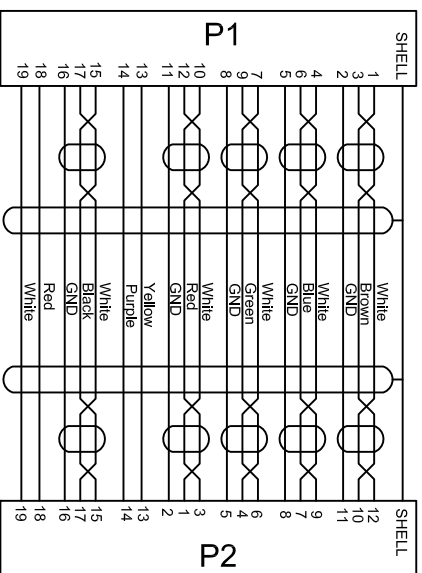


RoHS Compliant

REV	DESCRIPTION OF CHANGE	DATE
A0	INITIAL RELEASE	2012-05-04

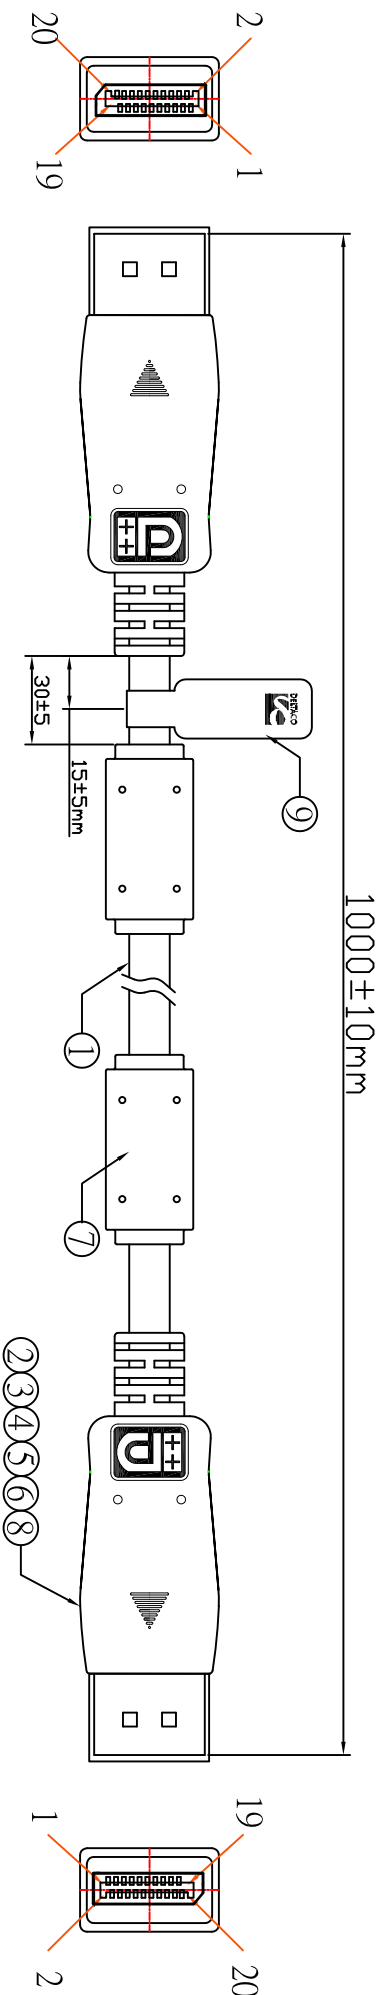

NOTES:

1. ELECTRICAL PROPERTIES:
 - 1.1 100% open and short test.
 - 1.2 Conductor resistance: 5 OHMS
 - 1.3 Insulation resistance: 10 MEGOHMS
 - 1.4 Hi pot: DC300V/0.01S
 - 1.5 Audio & Video test, Output resolution: 1920*1080P
2. All material be ROHS compliant.

9	Tag	AV-18C00153	Black background, White character(DP-1010)	1 Pcs
8	Dust cap	OR-0008	DP Dust cap	2 Pcs
7	ferrite core	OR-0016	ferrite core:14.2*28.5*9.5mm	2 Pcs
6	PVC	PVC-0001	60P PVC Black	36.0g
5	copper foil	AV-17B0012	copper foil:W:35*L:55mm*0.06mm	2 Pcs
4	masking tape	AM-1JZ0006	masking tape:W=30mm	100mm
3	PE	PE-0001	LDPE (RoHS)	22.0g
2	Connector	CN-C0012	DP(R/D),Gold-plated	2 Pcs
1	Cable	DP1-60-3034	(7/0.10TX)P+D+AL+MYLAR(X)SP+7/0.10TY,SC+F+ADBI(6/5/0.12(A)MA) JACKET PVC BLACK, OD:6.0±0.20mm L=960±5.40mm	1 Pcs
NO.	Material name	Item number	Specifications Description	Quantity

图号 (DWG NO)	XY-A0162	#数 (UNIT):	MM						
版次 (REV):	A0	比例 (SCALE)	1:1						
设计 (DESIGN)	Dean	审核 (CHECKED)		核准 (APPROVED)					
品名 (ITEM NO)		料号 (PART NO)							
品名 (ITEM NO)		DispalyPort Male to DisplayPort Male Cable, Molding type.							
料号 (PART NO)		DP-1010							

DIMENSIONS ARE IN MILLIMETERS
 UNLESS OTHERWISE SPECIFIED
 L:LENGTH W:WIDTH T:THICKNESS
 X ± 0.10 Y ± 0.10 Z ± 0.10
 A:ANGLE ± 0.5°